


>> Type of use (*)



>> Technical features

- ✓ Safety hook.
- ✓ **Class T.**
- ✓ Galvanized steel.
- ✓ Self opening and self locking type, double action.
- ✓ Opening **50 mm.**
- ✓ Minimum Breaking Strength: **23 kN**
- ✓ Weight: **473 g.**
- ✓ Packing:
 - carton of 25 pieces.
 - bundle of 1 piece.

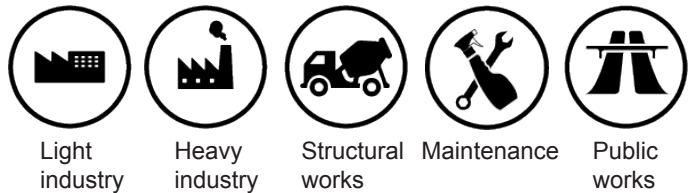

Learn more: www.singer.fr

>> Advantages

- ✓ All the connectors pass the salt spray test for 72 hours against 50 hours as required by the European standards. Thus we maintain a higher benchmark against corrosion.
- ✓ The outer and especially interior edges of the connectors are perfectly smooth.
- ✓ We control and produce in a single factory the creation and fabrication of the products: weaving coated thread into straps, stamping metal pieces and chemical treating, harness assembly, individual control and real-time testing thanks to the different laboratory devices and tools etc.
- ✓ **ISO 9001** certified manufacturing.



>> Conformity

This product has been tested according to the following European standard:
EN 362: 2004. Personal protective equipment against falls from a height. Connectors.



It complies with European **Regulation (EU) 2016/425** on Personal Protective Equipment (PPE). **Category III.**
 EU type examination certificate (**module B**) issued by **SATRA (Ireland)**. Notified body **n°2777**.
 The PPE is subject to the conformity assessment procedure based on quality assurance of the production process (**Module D**) set out in Annex VIII (Category III) under surveillance of **SGS Fimko Oy (Finland)**. Notified body **n°0598**.

Download the EU declaration of conformity on: <http://docs.singer.fr>

Your distributor **SINGER® SAFETY**



(*) Type of use is given as a guide only. It is to the end user to check whether the product is suitable or not for the intended use. Before any use, read carefully the instructions enclosed with the product. Issue LS_2019_12.30. Copyright: Singer, Fodlia.