



>> Use (*)

This type of glove is generally used for various handling jobs in dry, wet and oily conditions. Farmers, green space maintenance (landscapers, horticulturists, gardeners ...), craftsmen (roofers, carpenters, masons, carpenters ...), transport, logistics, handlers, movers, mechanics, engineering works, assembly shops, industrial maintenance, public works professions, do-it-yourself. etc.

>> General features

- ✓ **Construction:** Cut and sewn liner. Nitrile knuckle coated. Ultra-light coating. 100% cotton interlock liner. Open back (ventilated). Knitted wrist.
- ✓ **Colours:** natural liner, blue coating.
- ✓ **Sizes:** 7, 8, 9, 10.
- ✓ **Packaging:** - Carton of 100 pairs.
- Bundle of 10 pairs.



Learn more: www.singer.fr

>> Main advantages

- ✓ **Cotton liner:** brings the comfort of a natural material that facilitates the absorption of perspiration.
- ✓ The **ventilated unocated back** improves the evacuation.
- ✓ **The knitted wrist** allows a good fit of the product during use and allows to limit the penetration of particles inside the hand.
- ✓ **Ultra-light protective coating:** gives better flexibility and allows a good grip for handling small parts.
- ✓ **ISO 9001 / ISO 14001** certified manufacturing.

>> Conformity

This glove has been tested according to the following European standards :


- **EN 420 : 2003 + A1 : 2009.** Protective gloves - General requirements and test methods.
- **EN 388 : 2016.** Protective gloves against mechanicals risks.



It complies with **European Regulation (EU) 2016/425** on Personal Protective Equipment (PPE). **Category II.**

EU type examination certificate (module B) issued by the **CTC**, notified body n°0075.

| EN 388: 2016. Protective gloves against mechanical risks | | | | | | | |
|--|---------|---------|---------|----------|---------|----------|----------|
| Mechanical data. Information about levels. | Level 1 | Level 2 | Level 3 | Niveau 4 | Level 5 | Levels ▼ | |
| Abrasion resistance (number of cycles) | 100 | 500 | 2000 | 8000 | - | 3 | |
| Blade cut resistance (index) | 1,2 | 2,5 | 5,0 | 10,0 | 20,0 | 1 | |
| Tear resistance (in Newtons) | 10 | 25 | 50 | 75 | - | 1 | |
| Perforation resistance (in Newtons) | 20 | 60 | 100 | 150 | - | 1 | |
| Cut resistance (as per EN ISO13997) (TDM test) | Level A | Level B | Level C | Level D | Level E | Level F | Level |
| | 2 | 5 | 10 | 15 | 22 | 30 | X |

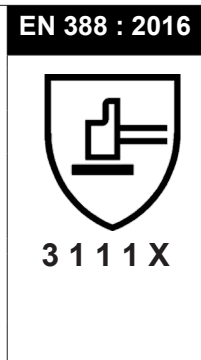

«X» means that the glove has not been submitted to the test.

Your distributor **SINGER® SAFETY**

